


# the Fire-Lite Series

- ⊙ A Standard Series fireplace listed for wood burning and formatted to be installed on a combustible floor.
- ⊙ Require additional floor frame load bearing capacity.
- ⊙ Require a minimum raised hearth of approximately a 12 inch finished height.
- ⊙ Provide the authentic look of a traditional masonry fireplace with less floor space needed.
- ⊙ Does not require the need for off-grade masonry foundation.
- ⊙ Suitable for use with vented gas log appliance (ANSI Z21.60).
- ⊙ Require the use of lightweight, air-cooled, double wall UL 103 metal flue.

## SPECIFICATIONS

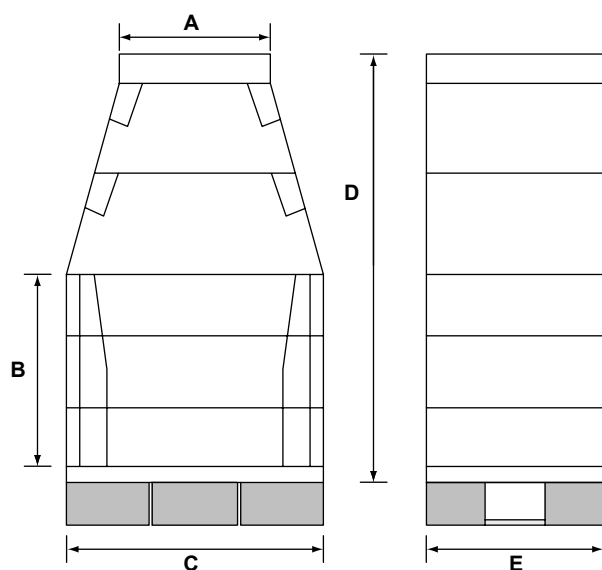

### 36 inch Fire-Lite

A	B	C	D	E	F
21½"	32"	43"	71"	25¼"	37"

**weight:** 1500 lbs.


**minimum framing:** 46"W x 80"H x 26¾"D

### 42 inch Fire-Lite

A	B	C	D	E	F
21½"	32"	49"	79"	25¼"	43"

**weight:** 1700 lbs.

**minimum framing:** 52"W x 88"H x 26¾"D

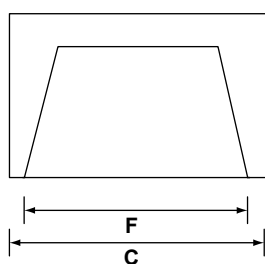

### 46 inch Fire-Lite

A	B	C	D	E	F
32"	32"	53"	71"	25¼"	47"

**weight:** 1700 lbs.

**minimum framing:** 46"W x 80"H x 26¾"D

## Additional Components

- Ceramic Fiber Insulation Board (Inswool)
- Concrete Blocks - 8" x 8" x 16" (may be substituted with metal stand)
- Anchor Plate (not shown / sold separately)

**!** Always check instruction manual for details or contact your local dealer prior to installation. All Fire-Lite Series fireplace systems can be custom finished to suit design, homeowner or builder needs. All Isokern® fireboxes require firebrick lining. Measurements and/or specifications are subject to change without prior notification.



UL 103, UL 127, UL 1777, ICC ER 5017

1.800.642.2920

<http://www.isokern.net>

