


the Standard Series

- ⊙ Listed for gas or wood burning and used where traditional masonry or prefabricated fireplaces are planned.
- ⊙ Require a traditional masonry foundation and can have a flush or raised hearth.
- ⊙ Require less floor space than traditional masonry units for same size fireplace openings.
- ⊙ Can be used with vented gas log appliance (ANSI Z21.60).
- ⊙ Require the use of Isokern® DM 54 chimney or UL 103 metal flue.

SPECIFICATIONS

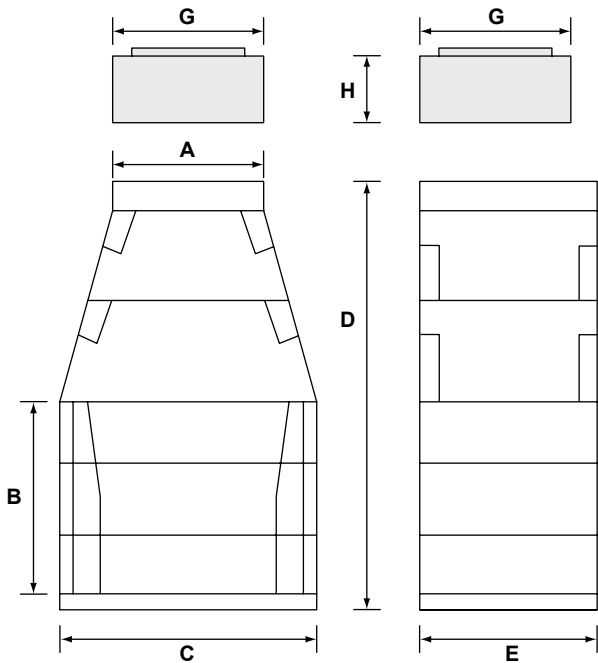

36 inch Standard

A	B	C	D	E	F
21½"	32"	43"	71"	25¼"	37"

weight: 1500 lbs.

minimum framing: 46"W x 73"H x 26¾"D

42 inch Standard

A	B	C	D	E	F
21½"	32"	49"	79"	25¼"	43"

weight: 1700 lbs.

minimum framing: 52"W x 81"H x 26¾"D

46 inch Standard

A	B	C	D	E	F
32"	32"	53"	71"	25¼"	47"

weight: 1700 lbs.

minimum framing: 56"W x 73"H x 26¾"D

Additional Components (sold separately)

G	H
21½"	12"

DM 54 Masonry Chimney

! Always check instruction manual for details or contact your local dealer prior to installation. All Standard Series fireplace systems can be custom finished to suit design, homeowner or builder needs. All Isokern® fireboxes require firebrick lining. Measurements and/or specifications are subject to change without prior notification.



UL 103HT, UL 127, UL 1777, ICC ER 5017

1.800.642.2920

<http://www.isokern.net>

